

Redi-Flo4 Environmental Submersible Pumps

Submittal Data

3450 RPM


60 Hertz



JOB or CUSTOMER:	
ENGINEER:	
CONTRACTOR:	
SUBMITTED BY:	DATE:
APPROVED BY:	DATE:
ORDER NO:	DATE:
SPECIFICATION REF:	

QUANTITY	TAG NO.	MODEL NO.	GPM	FEET	VOLT	PHASE	COMMENTS

Dimensions

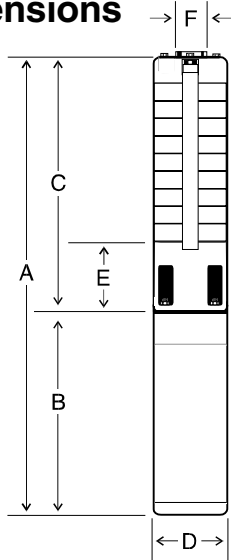

Technical Data

FLOW RANGE: 1.2 to 7 U.S. GPM

MOTORS: Grundfos MS402E Environmental Submersible Motor (Standard)
 Maximum Operating Temperature: 104°F (40°C)
 Maximum Submergence Pressure: 220 PSI
 Maximum Number of Starts Per Hour: 100
 Minimum Recommended Flow Past Motor: 0.25 ft./sec.

(NOTE: Franklin Pollution Recovery motor is optional.)

DISCHARGE SIZE: 1" NPT


MATERIALS OF CONSTRUCTION: See reverse side.

INSTALLATION: Unit to be installed vertically for submerged operation.

Electrical Data, Dimensions, and Weights ①

Pump Type	Motors				DIMENSIONS IN INCHES							
	HP	SF	PH	Volts	Overall Length A	Motor Length B	Pump End Length C	Max. Dia. D	Inlet E	Disch. Pipe Size (NPT) F	Net Weight (Lbs.) ^②	Ship. Weight (Lbs.) ^②
5E3	½	1.60	1	230	19 ⅜	10 13/16	8 9/16	3 31/32	3 ¼	1	24	26
5E5	½	1.60	1	230	21 ⅛	10 13/16	10 5/16	3 31/32	3 ¼	1	25	27
5E8	½	1.60	1	230	23 9/16	10 13/16	12 ¾	3 31/32	3 ¼	1	27	28
5E12	½	1.60	1	230	26 13/16	10 13/16	16	3 31/32	3 ¼	1	28	29
5E17	¾	1.50	1	230	31 7/16	11 3/8	20 3/16	3 31/32	3 ¼	1	31	32
5E21	1	1.40	1	230	35 7/16	12	23 7/16	3 31/32	3 ¼	1	33	35
5E25	1 ½	1.30	1	230	40 5/16	13 9/16	26 ¾	3 31/32	3 ¼	1	35	37

① Data for Grundfos MS402E motors. ② Does not include motor leads.

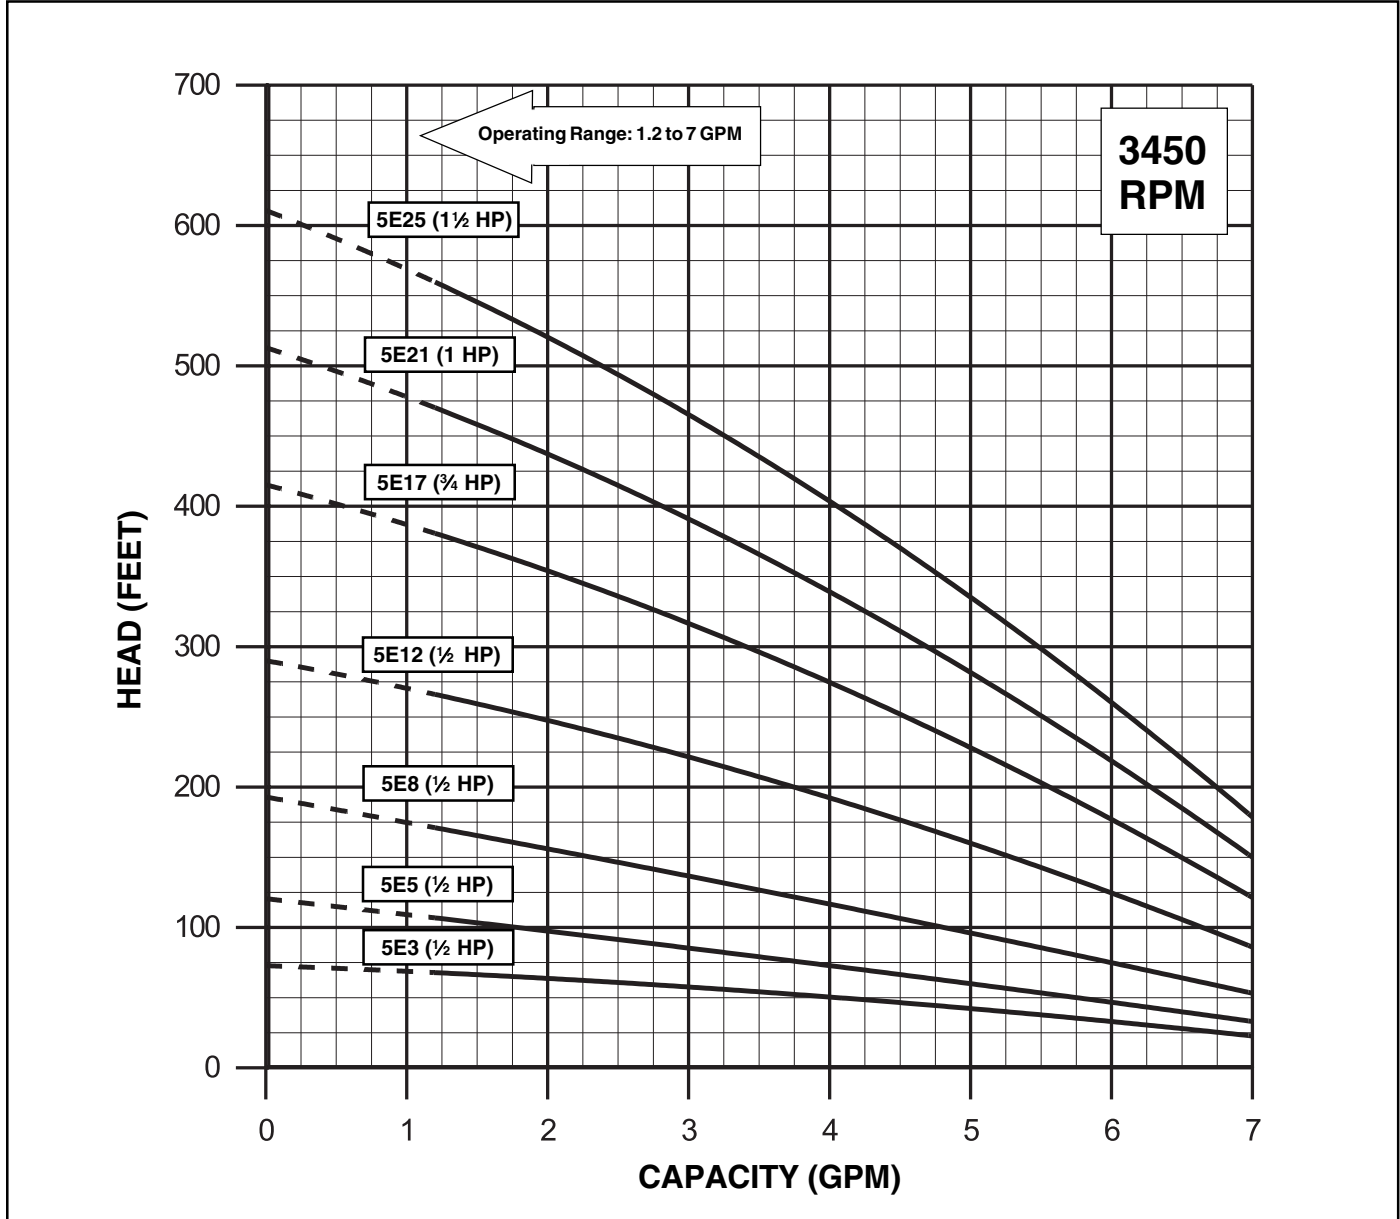

Materials of Construction

REDI-FLO4 PUMP END

Description	Material
Check Valve Housing, Check Valve, Diffuser Chamber, Impeller, Suction Interconnector, Inlet Screen, Pump Shaft, Straps, Cable Guard, Priming Inducer	304 SS
Check Valve Seat	304 SS & Teflon®
Impeller Seal Ring	Teflon®
Coupling	316/431 SS
Intermediate Bearings	Teflon®

GRUNDFOS ENVIRONMENTAL MOTOR LEADS

Description	Material
Connector Sleeve	304 SS
Connector Potting	Scotch Cast #4® Epoxy w/FPM Cap
Connector Plug	FPM
Lead Insulation	Teflon®
Conductor	Stranded Copper, 12 AWG

NOTES: Specifications are subject to change without notice.
 Teflon® is a registered trademark of DuPont.
 Scotch Cast #4® is a registered trademark of 3M Company.

GRUNDFOS ENVIRONMENTAL MOTOR

Description	Material
NEMA Top, Studs & Fasteners, Stator Housing, Fill Plug Screw	304 SS
Nuts	316 SS
Sand Slinger	FPM
Shaft Extension	431 SS
Diaphragm	FPM
Fill Plug Washer	Teflon®



GRUNDFOS Pumps Corporation • 3131 N. Business Park Ave. Fresno, CA 93727
Customer Service Centers: Allentown, PA • Fresno, CA
Phone: (800)333-1366 • **Fax:** (800)333-1363
Canada: Oakville, Ontario • **Mexico:** Apodaca, N.L.

Redi-Flo4 Environmental Submersible Pumps

Submittal Data

3450 RPM


60 Hertz



JOB or CUSTOMER:	
ENGINEER:	
CONTRACTOR:	
SUBMITTED BY:	DATE:
APPROVED BY:	DATE:
ORDER NO:	DATE:
SPECIFICATION REF:	

QUANTITY	TAG NO.	MODEL NO.	GPM	FEET	VOLT	PHASE	COMMENTS

Dimensions

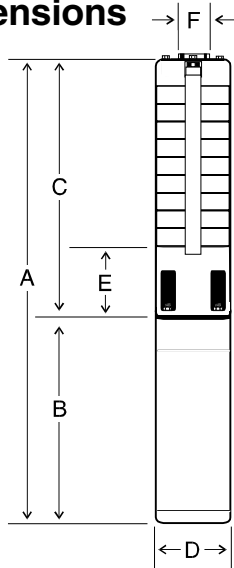

Technical Data

FLOW RANGE: 5 to 14 U.S. GPM

MOTORS: Grundfos MS402E Environmental Submersible Motor (Standard)
 Maximum Operating Temperature: 104°F (40°C)
 Maximum Submergence Pressure: 220 PSI
 Maximum Number of Starts Per Hour: 100
 Minimum Recommended Flow Past Motor: 0.25 ft./sec.

(NOTE: Franklin Pollution Recovery motor is optional.)

DISCHARGE SIZE: 1 1/4" NPT


MATERIALS OF CONSTRUCTION: See reverse side.

INSTALLATION: Unit to be installed vertically for submerged operation.

Electrical Data, Dimensions, and Weights †

Pump Type	Motors				DIMENSIONS IN INCHES								
	HP	SF	PH	Volts	Overall Length A	Motor Length B	Pump End Length C	Max. Dia. D	Inlet E	Disch. Pipe Size (NPT) F	Net Weight (Lbs.)†	Ship. Weight (Lbs.)†	
10E5	1/2	1.60	1	230	21 1/8	10 13/16	10 5/16	3 31/32	3 1/4	1 1/4	25	26	
10E8	1/2	1.60	1	230	23 9/16	10 13/16	12 3/4	3 31/32	3 1/4	1 1/4	26	28	
10E11	3/4	1.50	1	230	26 9/16	11 3/8	15 3/16	3 31/32	3 1/4	1 1/4	28	30	
10E14	1	1.40	1	230	29 11/16	12	17 11/16	3 31/32	3 1/4	1 1/4	31	32	
10E19	1 1/2	1.30	1	230	35 3/8	13 9/16	21 13/16	3 31/32	3 1/4	1 1/4	35	37	

† Data for Grundfos MS402E motors. † Does not include motor leads.

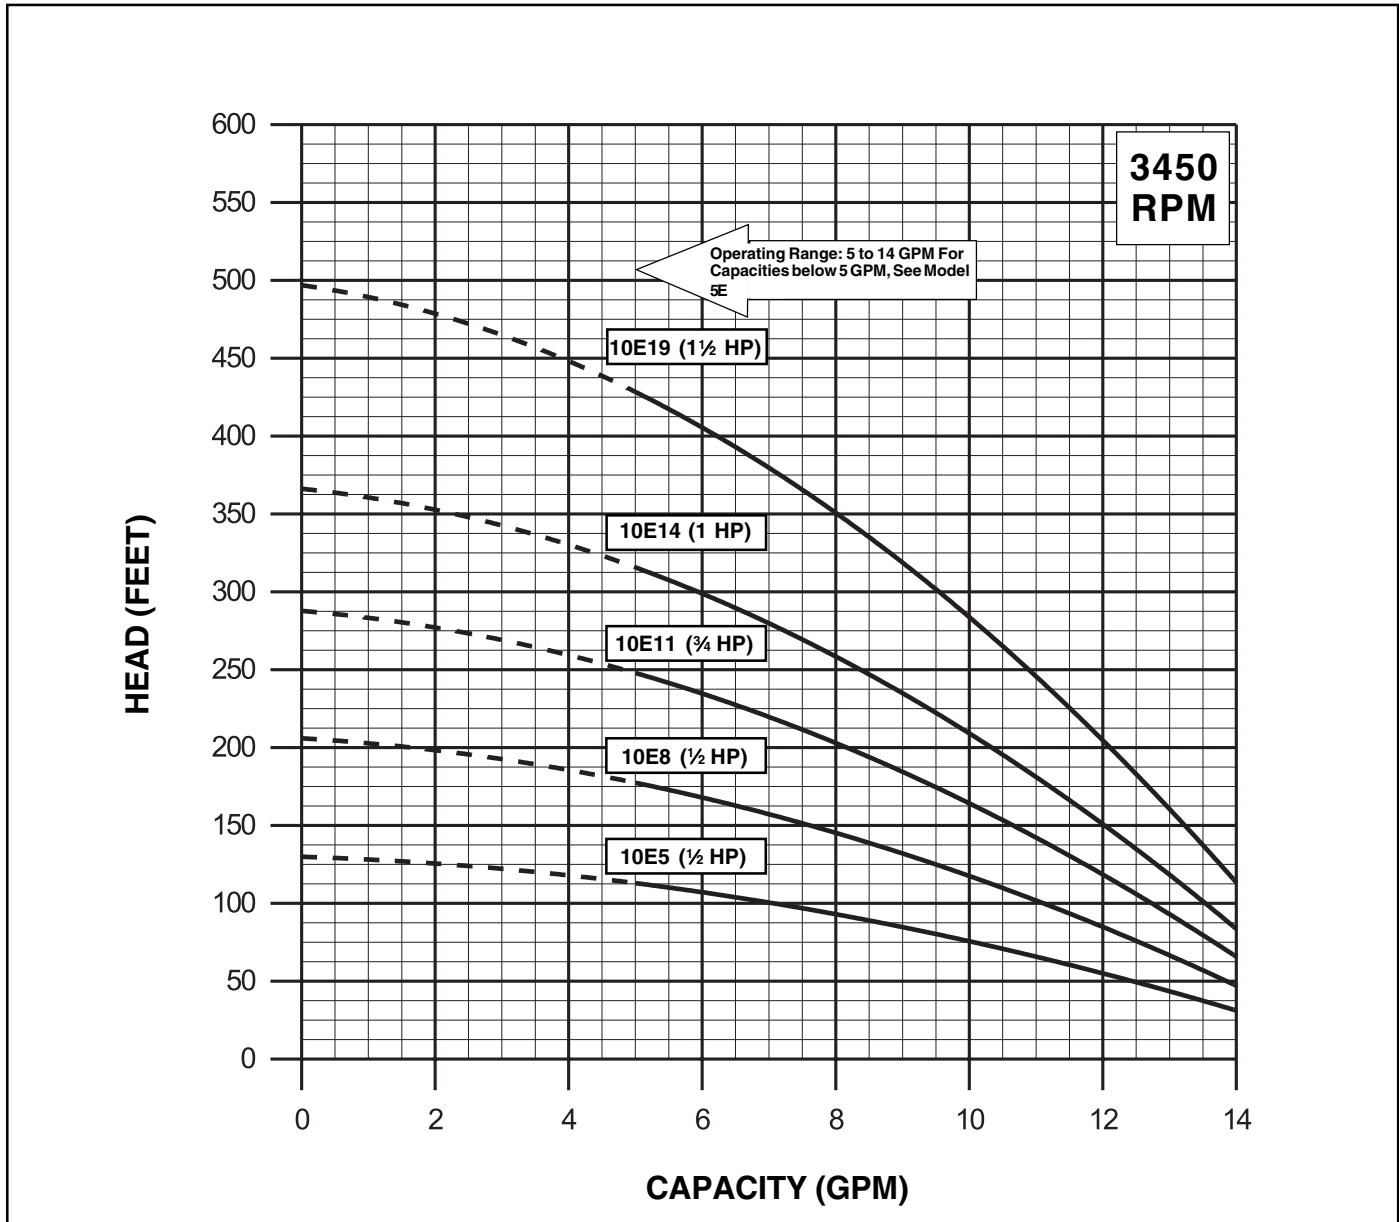

Materials of Construction

REDI-FLO4 PUMP END

Description	Material
Check Valve Housing, Check Valve, Diffuser Chamber, Impeller, Suction Interconnector, Inlet Screen, Pump Shaft, Straps, Cable Guard, Priming Inducer	304 SS
Check Valve Seat	304 SS & Teflon®
Impeller Seal Ring	Teflon®
Coupling	316/431 SS
Intermediate Bearings	Teflon®

GRUNDFOS ENVIRONMENTAL MOTOR LEADS

Description	Material
Connector Sleeve	304 SS
Connector Potting	Scotch Cast #4® Epoxy w/FPM Cap
Connector Plug	FPM
Lead Insulation	Teflon®
Conductor	Stranded Copper, 12 AWG

NOTES: Specifications are subject to change without notice.
 Teflon® is a registered trademark of DuPont.
 Scotch Cast #4® is a registered trademark of 3M Company.

GRUNDFOS ENVIRONMENTAL MOTOR

Description	Material
NEMA Top, Studs & Fasteners, Stator Housing, Fill Plug Screw	304 SS
Nuts	316 SS
Sand Slinger	FPM
Shaft Extension	431 SS
Diaphragm	FPM
Fill Plug Washer	Teflon®



GRUNDFOS Pumps Corporation • 3131 N. Business Park Ave. Fresno, CA 93727
 Customer Service Centers: Allentown, PA • Fresno, CA
 Phone: (800)333-1366 • Fax: (800)333-1363
 Canada: Oakville, Ontario • Mexico: Apodaca, N.L.

Redi-Flo4 Environmental Submersible Pumps

Submittal Data

3450 RPM


60 Hertz



JOB or CUSTOMER:	
ENGINEER:	
CONTRACTOR:	
SUBMITTED BY:	DATE:
APPROVED BY:	DATE:
ORDER NO:	DATE:
SPECIFICATION REF:	

QUANTITY	TAG NO.	MODEL NO.	GPM	FEET	VOLT	PHASE	COMMENTS

Dimensions

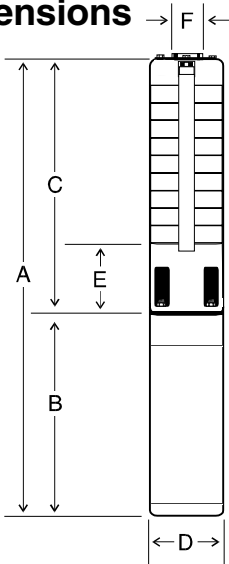

Technical Data

FLOW RANGE: 10 to 20 U.S. GPM

MOTORS: Grundfos MS402E Environmental Submersible Motor (Standard)
 Maximum Operating Temperature: 104°F (40°C)
 Maximum Submergence Pressure: 220 PSI
 Maximum Number of Starts Per Hour: 100
 Minimum Recommended Flow Past Motor: 0.25 ft./sec.

(NOTE: Franklin Pollution Recovery motor is optional.)

DISCHARGE SIZE: 1 ¼" NPT


MATERIALS OF CONSTRUCTION: See reverse side.

INSTALLATION: Unit to be installed vertically for submerged operation.

Electrical Data, Dimensions, and Weights ①

Pump Type	Motors				DIMENSIONS IN INCHES							
	HP	SF	PH	Volts	Overall Length A	Motor Length B	Pump End Length C	Max. Dia. D	Inlet E	Disch. Pipe Size (NPT) F	Net Weight (Lbs.) ^②	Ship. Weight (Lbs.) ^②
16E4	½	1.60	1	230	20 ¼	10 13/16	9 7/16	3 3/32	3 ¼	1 ¼	25	27
16E7	¾	1.50	1	230	23 ¼	11 3/8	11 7/8	3 3/32	3 ¼	1 ¼	27	28
16E9	1	1.40	1	230	25 9/16	12	13 9/16	3 3/32	3 ¼	1 ¼	28	30
16E13	1 ½	1.30	1	230	30 7/16	13 9/16	16 7/8	3 3/32	3 ¼	1 ¼	33	34

① Data for Grundfos MS402E motors. ② Does not include motor leads.

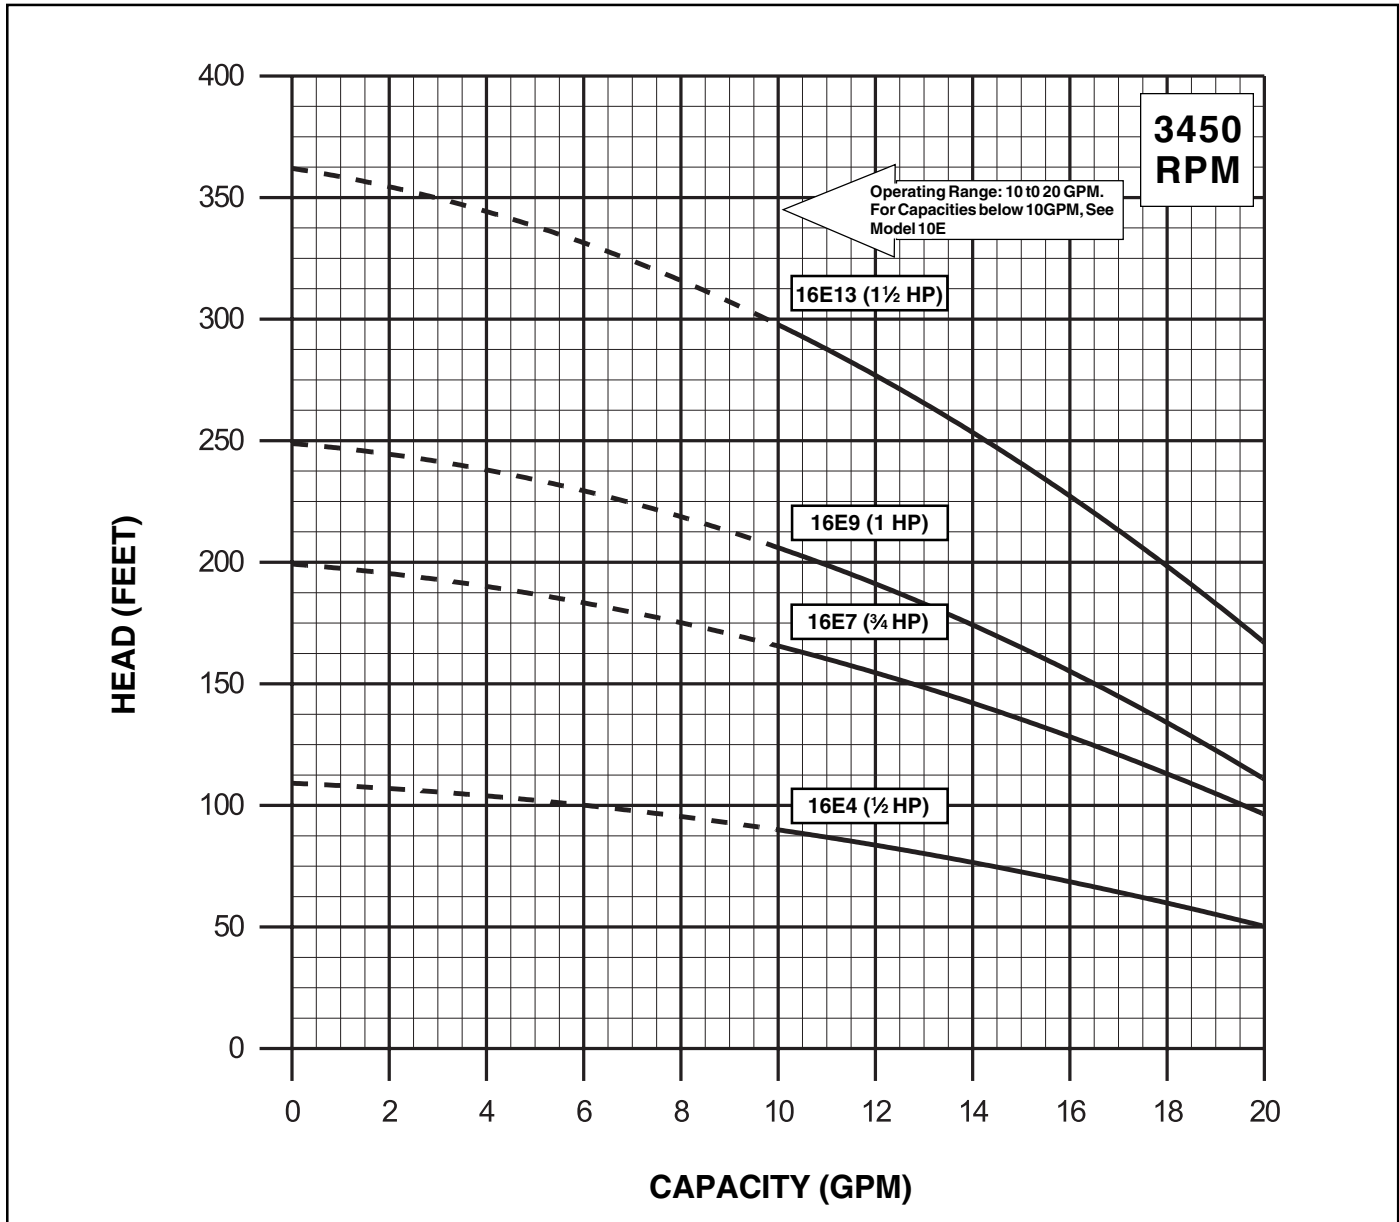

Materials of Construction

REDI-FLO4 PUMP END

Description	Material
Check Valve Housing, Check Valve, Diffuser Chamber, Impeller, Suction Interconnector, Inlet Screen, Pump Shaft, Straps, Cable Guard, Priming Inducer	304 SS
Check Valve Seat	304 SS & Teflon®
Impeller Seal Ring	Teflon®
Coupling	316/431 SS
Intermediate Bearings	Teflon®

GRUNDFOS ENVIRONMENTAL MOTOR LEADS

Description	Material
Connector Sleeve	304 SS
Connector Potting	Scotch Cast #4® Epoxy w/FPM Cap
Connector Plug	FPM
Lead Insulation	Teflon®
Conductor	Stranded Copper, 12 AWG

NOTES: Specifications are subject to change without notice.
Teflon® is a registered trademark of DuPont.
Scotch Cast #4® is a registered trademark of 3M Company.

GRUNDFOS ENVIRONMENTAL MOTOR

Description	Material
NEMA Top, Studs & Fasteners, Stator Housing, Fill Plug Screw	304 SS
Nuts	316 SS
Sand Slinger	FPM
Shaft Extension	431 SS
Diaphragm	FPM
Fill Plug Washer	Teflon®



GRUNDFOS Pumps Corporation • 3131 N. Business Park Ave. Fresno, CA 93727
Customer Service Centers: Allentown, PA • Fresno, CA
Phone: (800)333-1366 • **Fax:** (800)333-1363
Canada: Oakville, Ontario • **Mexico:** Apodaca, N.L.

Submittal Data

3450 RPM


60 Hertz



JOB or CUSTOMER:	
ENGINEER:	
CONTRACTOR:	
SUBMITTED BY:	DATE:
APPROVED BY:	DATE:
ORDER NO:	DATE:
SPECIFICATION REF:	

QUANTITY	TAG NO.	MODEL NO.	GPM	FEET	VOLT	PHASE	COMMENTS

Dimensions

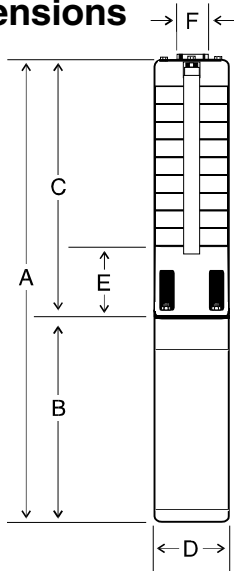

Technical Data

FLOW RANGE: 18 to 32 U.S. GPM

MOTORS: Grundfos MS402E Environmental Submersible Motor (Standard)
 Maximum Operating Temperature: 104°F (40°C)
 Maximum Submergence Pressure: 220 PSI
 Maximum Number of Starts Per Hour: 100
 Minimum Recommended Flow Past Motor: 0.25 ft./sec.

(NOTE: Franklin Pollution Recovery motor is optional.)

DISCHARGE SIZE: 1 1/2" NPT


MATERIALS OF CONSTRUCTION: See reverse side.

INSTALLATION: Unit to be installed vertically for submerged operation.

Electrical Data, Dimensions, and Weights ①

Pump Type	Motors				DIMENSIONS IN INCHES							
	HP	SF	PH	Volts	Overall Length A	Motor Length B	Pump End Length C	Max. Dia. D	Inlet E	Disch. Pipe Size (NPT) F	Net Weight (Lbs.) ^②	Ship. Weight (Lbs.) ^②
25E3	1/2	1.60	1	230	19 3/8	10 13/16	8 9/16	3 31/32	3 1/4	1 1/2	24	25
25E4	3/4	1.50	1	230	20 13/16	11 3/8	9 7/16	3 31/32	3 1/4	1 1/2	25	27
25E6	1	1.40	1	230	23 1/16	12	11 1/16	3 31/32	3 1/4	1 1/2	27	29
25E8	1 1/2	1.30	1	230	26 5/16	13 9/16	12 3/4	3 31/32	3 1/4	1 1/2	28	30

① Data for Grundfos MS402E motors. ② Does not include motor leads.

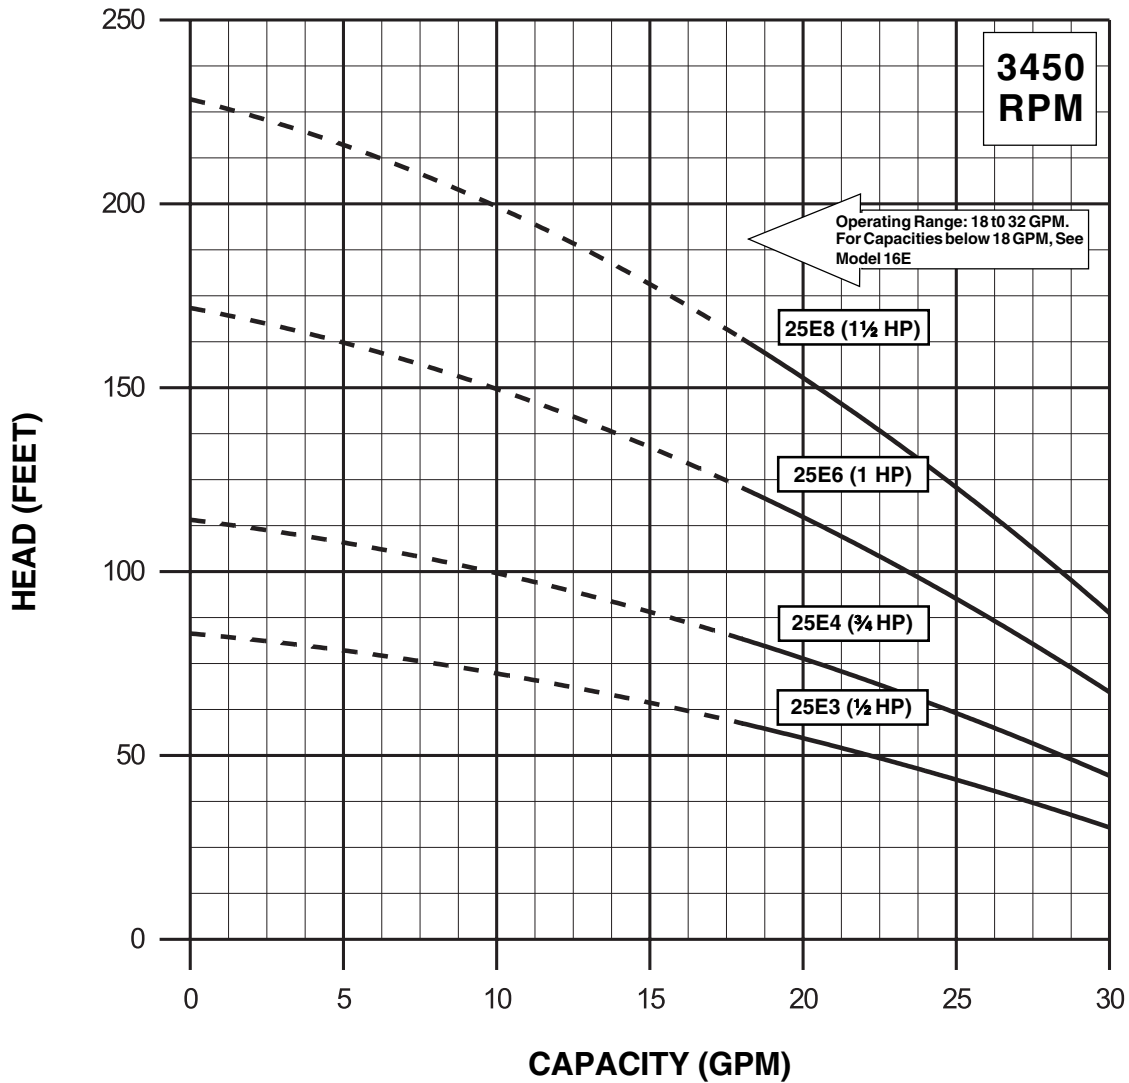

Materials of Construction

REDI-FLO4 PUMP END

Description	Material
Check Valve Housing, Check Valve, Diffuser Chamber, Impeller, Suction Interconnector, Inlet Screen, Pump Shaft, Straps, Cable Guard, Priming Inducer	304 SS
Check Valve Seat	304 SS & Teflon®
Impeller Seal Ring	Teflon®
Coupling	316/431 SS
Intermediate Bearings	Teflon®

GRUNDFOS ENVIRONMENTAL MOTOR LEADS

Description	Material
Connector Sleeve	304 SS
Connector Potting	Scotch Cast #4® Epoxy w/FPM Cap
Connector Plug	FPM
Lead Insulation	Teflon®
Conductor	Stranded Copper, 12 AWG

NOTES: Specifications are subject to change without notice.
Teflon® is a registered trademark of DuPont.
Scotch Cast #4® is a registered trademark of 3M Company.

GRUNDFOS ENVIRONMENTAL MOTOR

Description	Material
NEMA Top, Studs & Fasteners, Stator Housing, Fill Plug Screw	304 SS
Nuts	316 SS
Sand Slinger	FPM
Shaft Extension	431 SS
Diaphragm	FPM
Fill Plug Washer	Teflon®



Environmental Equipment & Supply
491L Blue Eagle Ave., Harrisburg, PA 17112
Ph: (800) 739-7706 Fax: (717) 901-8114
www.envisupply.com